

SYNOR 5000-C

Technical data sheet

Automatic cable tester

SYNOR 5000-C

Maximum test points number	Up to 11 264 points	
Maximum switching cards number	88	
Tests types performed	Continuity, Isolation, Dielectric, Functional, and Components	
Main power supply	115-230 VAC $\pm 15\%$ 47 to 64 Hz / single-phase	
Entry Power	Depending on the number of integrated racks x 300 VA	
Temperature range	Storage: -10°C to +60°C Operation: 0°C to +45°C Specifications guaranteed after a 1/2 hour warm-up and relative humidity <50%	
Altitude	Up to 2 000 m	
Relative Humidity	90 % max. by 31°C	
DIMENSIONS	Height	13U à 36U
	Width	600 mm
	Depth	800 mm
	Weight	~100 kg
Security class	Class 1 (ground connection)	
Overvoltage category	CAT II	
Pollution Degree	2	

 For more technical information on the SYNOR 5000-C, including details on tests, switching cards, accessories, and available options, you can refer to the overview of the SYNOR 5000 series.



ADVANTAGES


- Integrated rack tester for high-volume test point applications
- Possibility of extending the number of points by adding SYNOR 5000-CS racks
- Operates with an integrated or remote computer
- 19-inch rack
-  • **WINPASS software:** compatible with all versions of Windows, multilingual on request
-  • **Connector outputs on selection**
 - SY5000-CAL calibration box
-  • **Choice of switching cards**
 - Compatible with the SYNOR 4200 series
 - Ethernet, PLC interfaces
-  • **Options and accessories available**
 - Available in 4 sizes: 13U, 18U, 27U, 36U

APPLICATIONS & INDUSTRIES


- Railway
- Military
- Production & Laboratory
- Aerospace / Space
- Cable, harness, and connector manufacturers

DESIGN

FRONT PANEL

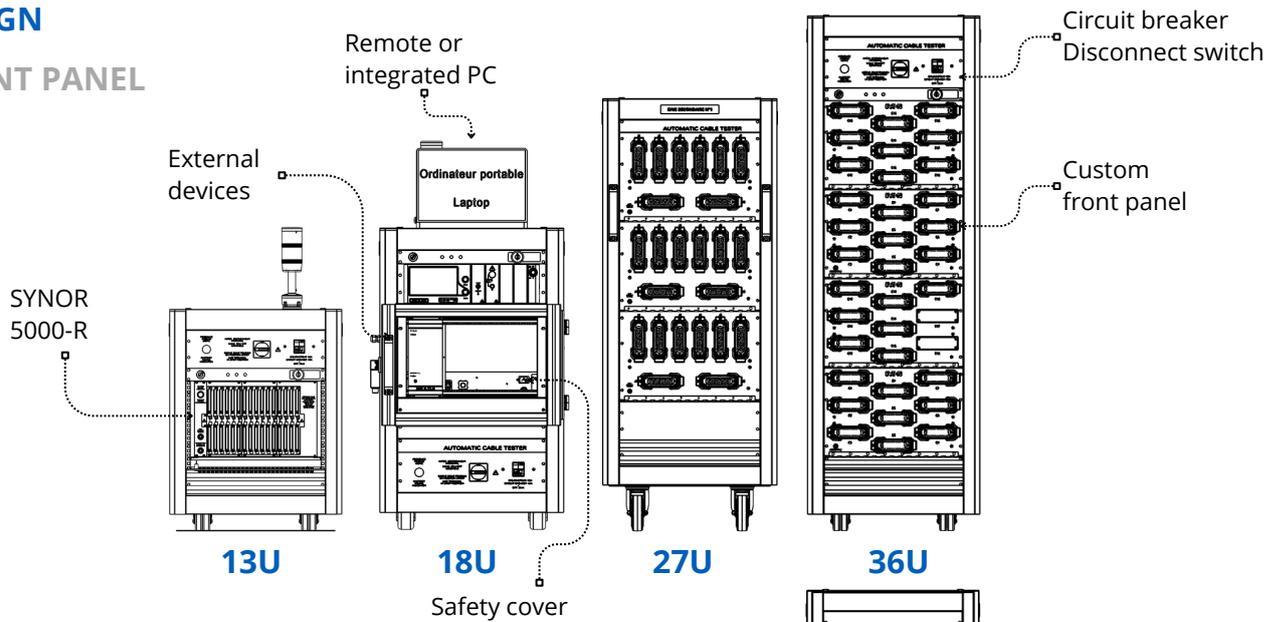

BACK PANEL

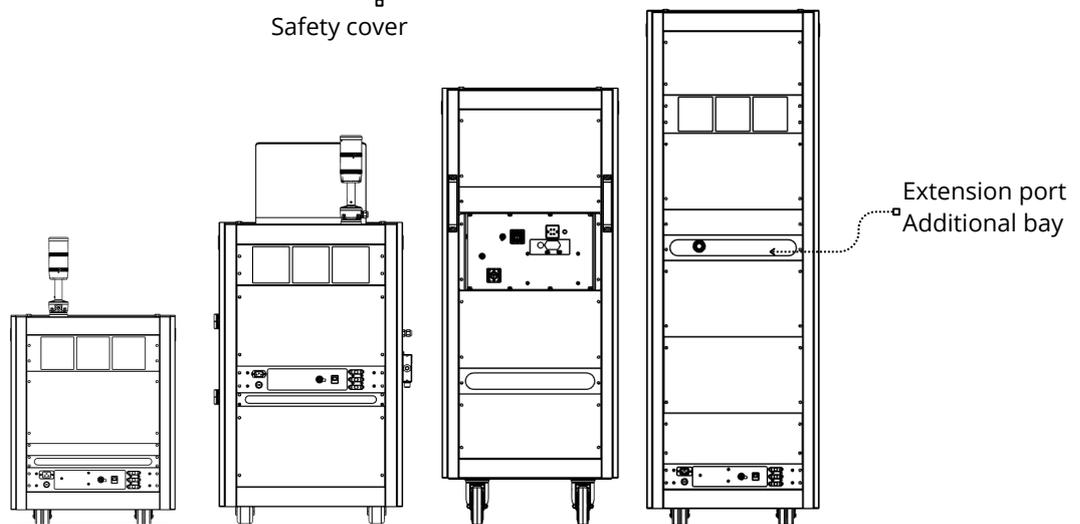

For more technical information on the SYNOR 5000-C, including details on tests, switching cards, accessories, and available options, you can refer to the overview of the SYNOR 5000 series.

Discover our product ranges:



Automatic cable tester SYNOR

- From 8 to 140,000 test points
- Continuity in 2 and 4 wires up to 10A
- Isolation up to 5000V DC
- Dielectric strength up to 4000V AC and 5500V DC
- Configuration: in cabinet or compact case, mobile or remote



SCANNER 64-SC

- High density: 8 to 512 channels
- Maximum voltage: 5kVAC 500VA and 6kVDC
- Insulation: up to 200GΩ under 1000 VDC
- Ground continuity: up to 32A AC max.
- Compliant with: IEC 61010-2-034



SEFELEC 5X

- Dielectric strength: 5 kVAC and 6 kVDC with a power of 50 or 500VA
- Insulation measurement: under 1000VDC for measurements up to 2 TΩ
- Ground continuity control: under 32A or 50AAC