



SEFELEC 1500M

The EATON Tera-Ohmmeter / Pico-Ammeter

SEFELEC 1500M features and benefits:

Tera-Ohmmeter from 100 Ω to 2000 TΩ

Pico-Ammeter from 20,00 pA to 20,00 mA

Measurement voltage adjustable volt by volt from 1 V to 1500 VDC

Up to 100kV measurement voltage with an external DC source

7" TFT Multi touch screen 16 M colors

ARM-Dual core control & Nand 3D technologies inside for more accuracy, stability and repeatability

DSP measurement speeds the test

WIFI capabilities for wireless connection to industrial networks

IEC 61010-2-034 new safety standard compliant

The **SEFELEC 1500M** is a new generation EATON Tera-Ohmmeter / Pico-Ammeter, based and controlled by ARM-Dual Core and DSP technologies providing the best stability and repeatability.

The high accuracy and measurement speed are suitable for quality control or incoming inspection departments.

The MΩ x km function makes the **SEFELEC 1500M** easy to use for cable manufacturers.

The new SEFELEC Series HMI, with its 7" dual-touch TFT screen, offers simple and intuitive operations.


- Native Ethernet / RS232 / USB / PLC / 0-10 V / CAN IEEE488-2 interface in option
- SIL2 double safety loop
- Automatic and manual range selection
- Large internal memory for configurations and measurement data storage
- Measurement speed selectable from 1 to 10 readings/sec
- Humidity and temperature measurement




Powering Business Worldwide

SEFELEC 1500M : Tera-Ohmmeter / Pico-Ammeter overview


FRONT PANEL

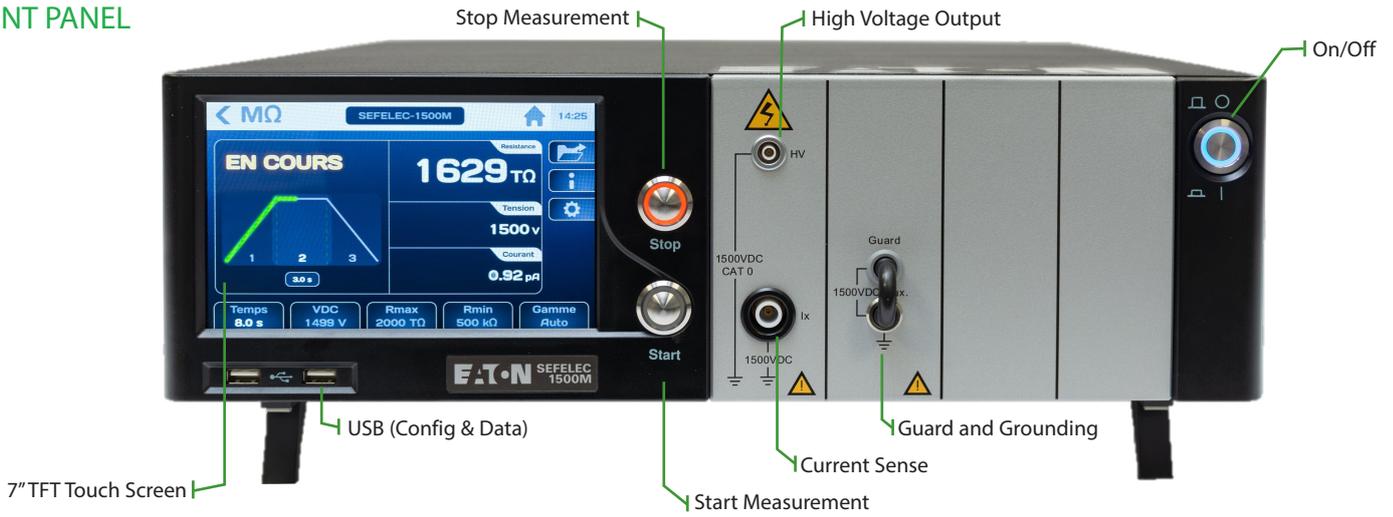


REAR PANEL

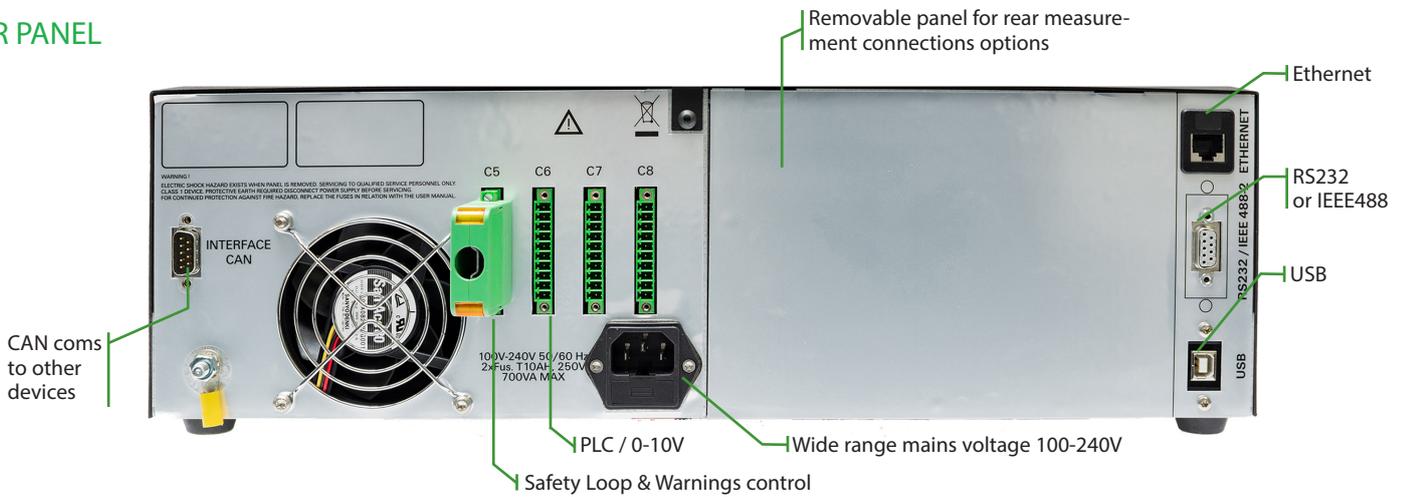

DIMENSIONAL DIAGRAMS

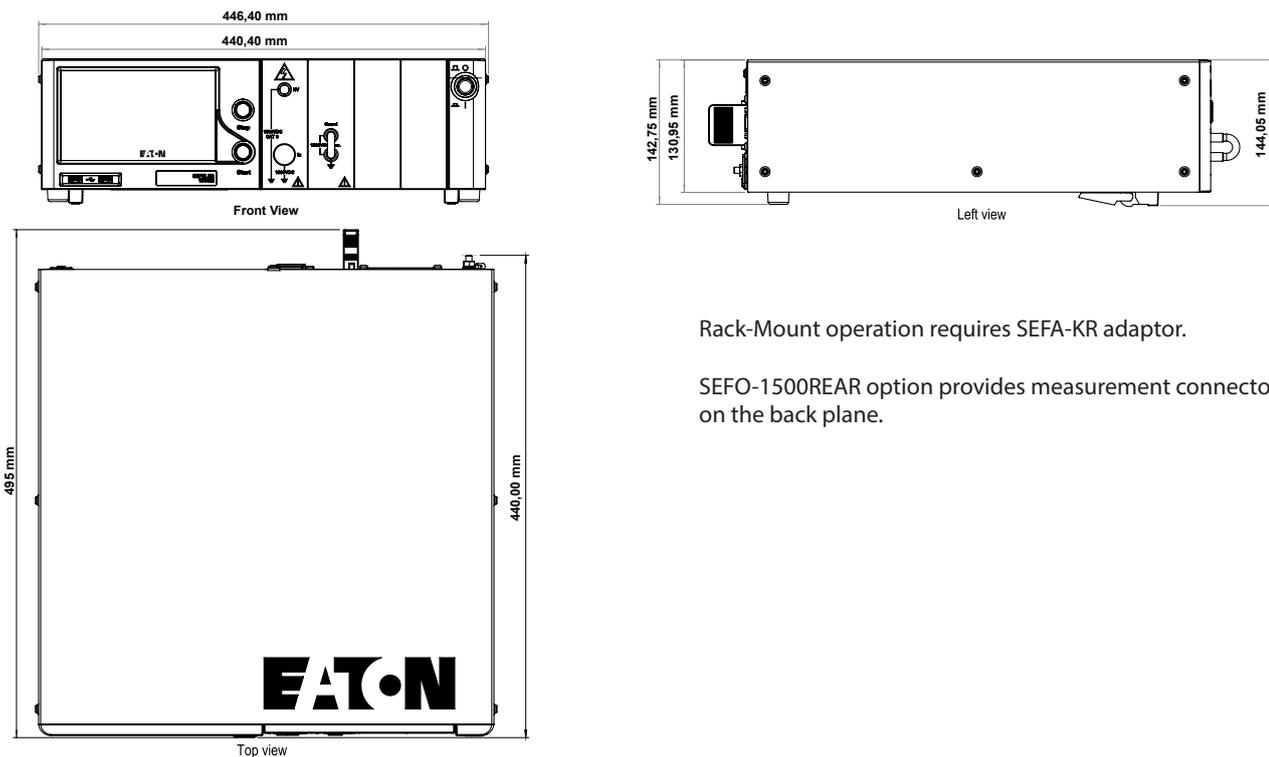

SEFELEC 1500M : Touch-Screen overview

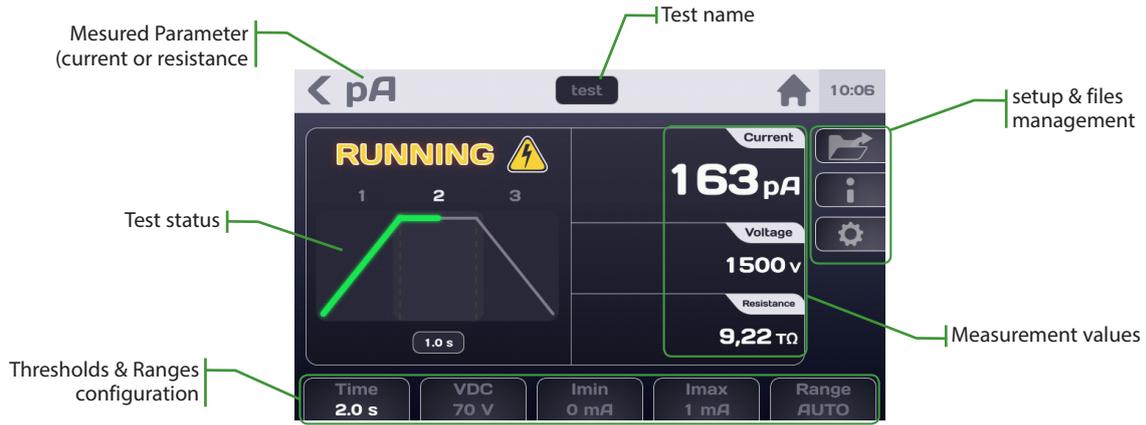

SEFELEC 1500M : Accessories & Options

SEFA-SE15



SEFA-HV15



SEFA-1500MRHT



Accessories

- SEFA-SE15** Sense cable end with probe - 1,5 meter + Lemo Connector
- SEFA-HV15** High Voltage cable, end with 4mm plug - 1,5m + Lemo Connector
- SEFA-HVSE15-10** Set of 2 x 10m length cable for test bench integration
- SEFA-KR** SEFELEC Series 19" Rack Mounting Adaptors
- SEFA-1500MRHT** Humidity and Temperature measurement probe for SEFELEC Series / USB

SEFO-IEEE488



Options

- SEFO-IEEE488** IEEE488-2 communication interface
- SEFO-1500REAR** Rear connections
- SEFO-CO160** Green/red safety lamp

TECHNICAL SPECIFICATIONS

General Specifications				
Mains	100-240 VAC $\pm 10\%$ 50 to 60 Hz / single phase			
Mains protection	Temporized double fuse T10AH 250V			
Input Power	700 VA max.			
Temperature range	Storage		Operation	
	-10°C to +60°C		0°C to +45°C	
Specified accuracy after 1/2 hour warm-up and RH<50 %				
Altitude	Up to 2 000 m			
Relative humidity	80 % max. @ 31°C			
Dimensions & Weight	Height	Width	Depth	Weight
	131 mm	440 mm	455 mm	
Output voltage				
Voltage range	adjustable by step of 1 volt from 1 Vdc to 1500 Vdc			
Accuracy	$\pm (0.5\% + 0.5\text{ V})$			
Short circuit current	20 mA ($\pm 10\%$) can be limited to 3 mA			
Dynamic stability	$> 1.10^{-6}$ for mains variation of $\pm 15\%$			
Nominal current	from 1 V to 10 V	from 11 V to 1000 V	from 1000 V to 1500 V	
	1 mA ($\pm 0.5\%$)	10 mA ($\pm 10\%$)	5 mA ($\pm 10\%$)	
Polarity	Positive pole to HV terminal or Negative pole to guard terminal Possibility to ground positive or negative high voltage pole			
Voltage ripple	$\pm 100\text{ mV}$ peak to peak for 10 mA output current			
Noise 0,01Hz à 10Hz	100 μV max (20°C)			
Temperature coefficient	0.001 %/°C			
Max D.U.T. capacitance	< 1 mF			
Discharge resistance	2.2 k Ω			
Tera-Ohmmeter specifications				
Measurement range	from 0,100 k Ω to 2 000 T Ω with 10 measurement current ranges			
Temperature coefficient	$\pm 0.1\%$ /°C			
Display resolution	3 ^{1/2} digits			
Test voltage (ex.)	10 V	100 V	1 500 V	
	from 10 ³ to 2.10 ¹³ Ω	from 10 ⁴ to 2.10 ¹⁴ Ω	from 3.10 ⁵ to 2.10 ¹⁵ Ω	
Accuracy	\pm [current range accuracy + (50/Test Voltage) % + 1 digit] of read value			
Threshold	x2. High and low from 0,100 k Ω to 2000 T Ω			
Pico-Ammeter specifications				
Ranges	500 fA to 20 mA in 10 ranges / automatic or manual range selection			
	Range	Minimum value	Resolution	Accuracy @25°C
	20,00 pA	0.50 pA	10 fA	0.3 % reading + 500 fA
	200,0 pA	19.8 pA	100 fA	0.2 % + 0,3 pA
	2,000 nA	0.198 pA	1 pA	0.2 % + 2 pA
	20,00 nA	1.98 nA	10 pA	0.2 % + 20 pA
	200,0 nA	19.8 nA	100 pA	0.2 % + 200 pA
	2,000 μA	0.198 μA	1 nA	0.2 % + 2 nA
	20,00 μA	1.98 μA	10 nA	0.2 % + 20 nA
	200,0 μA	19.8 μA	100 nA	0.2 % + 200 nA
	2,000 mA	0.198 mA	1 μA	0.2 % + 2 μA
	20,00 mA	1.98 mA	10 μA	0.2 % + 20 μA
	Nota: 1 pA = 0.001 nA = 0.000 001 μA = 0.000 000 001 mA = 1x10 ⁻¹² A			
Display resolution	3 ^{1/2} digits			
Input impedance	Range		Impedance	
	20 mA		9 Ω 1 %	
	2 mA		90 Ω 1 %	
	Others		9 k Ω 1 %	
Threshold	x2. High and low from 00.50 pA to 20.00 mA			
External voltage source	up to 100 kV DC with BAPA option RLHT50 or RLHT70 limitation resistors for sources > 10 kV DC			

Information on this document can be modified by EATON without notice

FTEN-SEFELEC1500M v1.2

Eaton - Sefelec sas
19 rue des Campanules
F-77185 Lognes - FR
Head Office
+33 (0)1 64 11 83 42
Service Department
+33 (0)1 64 11 83 48

Eaton - Sefelec GmbH
Karl- Bold- Str. 40
D-77855 Achern
Deutschland
Zentrale
+49 (0) 7841 640 77 – 0
Fax
+49 (0) 7841 640 77 – 29

To interact with the SEFELEC 1500M, please visit:
Eaton.com



© 2018 Eaton
All Rights Reserved
Printed in FR
August 2018

Eaton and Intelligent Power are registered trademarks.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

